



Lumistrips

# DATASHEET

LUMIBAR-26-3098+ NICHIA LED STRIP ZHAGA L28W2 WHITE CRI 80-99 1800-7800K 350MA 26 LEDS 28CM

SKU: LUMIBAR\_28\_3098



LUMIBAR-26-3098+ NICHIA LED STRIP ZHAGA L28W2 WHITE CRI 80-99 1800-7800K 350MA 26 Leds 28CM

Article number (SKU)		lumibar_28_3098	
Product name	LUMIBAR-26-3098+ NICHIA LED STRIP ZHAGA L28W2 WHITE CRI 80-99 1800-7800K 350MA 26 Leds 28CM		
Classification	Professional		
Model identifier (equivalent models)	LinearZ-26		
Photometric data (at T <sub>J</sub> = 65°C, ± 10%)			
Light color	White		
Binning	3-Step MacAdam		
Color temperature (K)	1800 - 7800 K*		
Luminous flux (lm)	750-1500 lm*	3000 lm/m	
Radiant power (mW)	*		
CRI (Ra)	70-99+*		
Efficiency (lm/W)	*		
Beam angle FWHP	120°		
Lifetime L80B10C1 (h)	>60000 h		
Electrical data (at T <sub>J</sub> = 65°C, ± 10%) (reference settings)			
Operating mode	Constant Current		
Voltage (V)	175mA*		
Current (mA)	*		
Power (W)	*	*	
Standby power consumption (W)	*		
Dimmable	Yes		
Dimensions / Mechanical data		Metric units	Imperial units
Length	279.5 mm	10.984"	
Width	20 mm	0.786"	
Height	4.55 mm	0.179"	
Number of LEDs (pcs)	26 pcs		
Weight (g)	*		
Heat dissipation	*		
Temperatures			
Operating temperature at T <sub>c</sub>	-40 to +85 °C		
Ambient temperature	-40 to +50 °C		
Storage temperature	-40 to +100 °C		
Approvals / Certifications			
CE / RoHS / Reach	Yes		
EN 62471 Risk group	RG0		
Energy efficiency class	*		
Version			
Date	20. May 2024		

\*Custom made LED strip, values depend on customer selection. Datasheet for the configured custom made variant will be provided after order confirmation.




LUMIBAR-26-3098+ NICHIA LED STRIP ZHAGA L28W2 WHITE CRI 80-99 1800-7800K 350MA 26  
LEDS 28CM

#### WARRANTY INFO



This LED Strip has 5 years commercial warranty. Please refer to <https://www.lumistrips.com/lumistrips-en-warranty> for warranty terms.

#### MANUFACTURING INFO

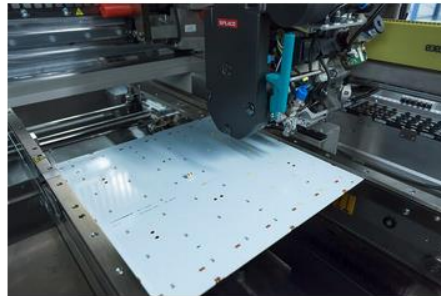

This LED strip is **made in Germany**, at a production line that uses the innovative manufacturing technology.

**Our professional LED Strips and Modules use LEDs from market leaders**

## LUMIBAR-26-3098+ NICHIA LED STRIP ZHAGA L28W2 WHITE CRI 80-99 1800-7800K 350MA 26 Leds 28CM


We develop and produce our LED strips at a state of the art facility in Germany, with the highest quality standards and by using only LEDs from market leaders such as Nichia, Samsung or Toshiba.

- **Nichia** is the LED market leader, with over 25% market share and decades of experience. Nichia researchers invented the blue and white LED production technology, also receiving the Nobel Prize for this achievement. Nichia LEDs are the **most efficient** (200 lm / w efficacy), durable (> 100,000 hours) and are also available with unique technologies such as **Optisolis**, CRI98+ natural light spectrum and **Rsp0a**, special white light for horticulture.
- **Samsung** is in the top 10 of global LED manufacturers and a well-known brand, renowned for the high performance of its products combined with the competitive price
- **Toshiba** is a Japanese conglomerate with a history of more than a century, now specialized in semiconductors, electronics and hardware, with nearly 20,000 employees and an annual turnover of 40 billion USD. Toshiba has built the TRI-R technology and built the LED chips used in **SunLike CRI97+ LEDs** produced by Seoul Semiconductor in South Korea. With the new **SunLike™ TRI-R™** technology from Toshiba-SSC (Seoul Semiconductor) and our strips and modules you can always enjoy a natural light source with the light spectrum very close to the sun.
- **Seoul Semiconductor** is in the top 10 of global LED manufacturers and renowned for innovation, durability and competitive price

### Our strips have high quality components and professional support:


- We use LEDs from top brands and have superior designs
- We offer **professional support** for lighting projects
- The PCBs use high quality materials for best resistance, current flow and heat transfer
- Performance values in this datasheet match those in real world applications
- Function perfectly at high temperatures that would destroy many other strips

## CONNECTION OF LED STRIP

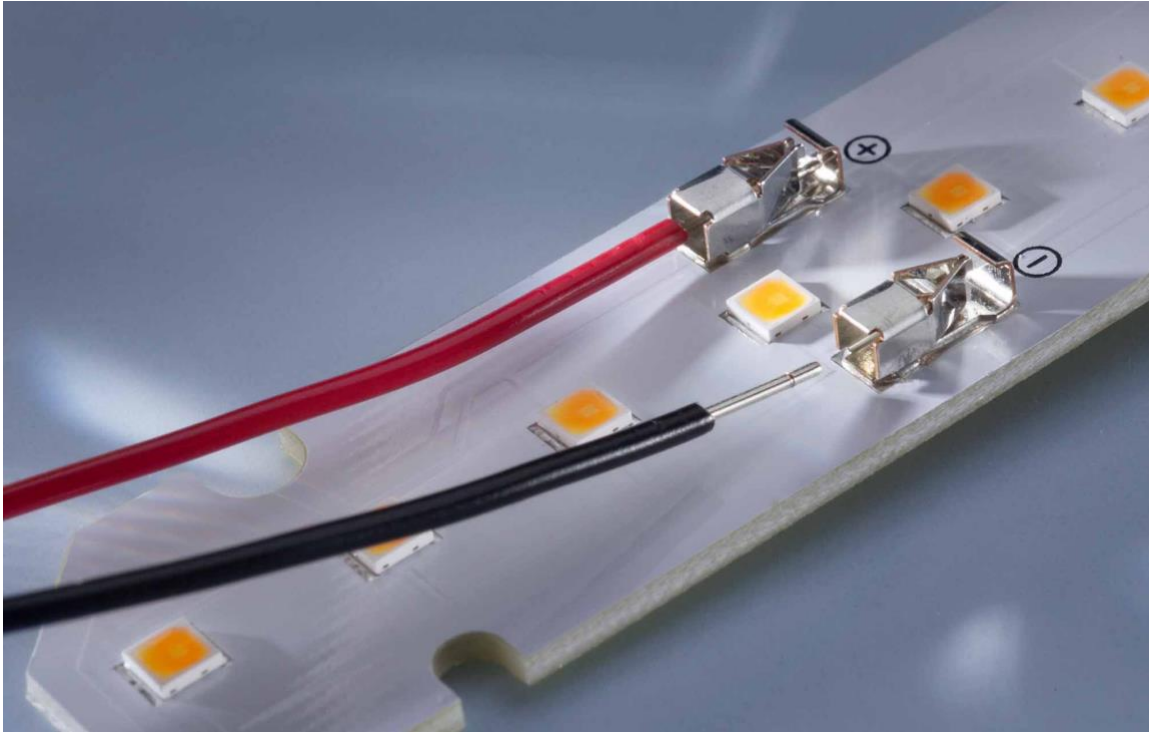

The professional LumiBar strip is connected via a solderless connection to the connection inputs provided for this purpose. **The form factor and connection is designed according to the Zhaga standard (Book 7 L56W2).**

The wire insulation has to be removed at the connection point. Recommend wire cross-section of inner conductor:  $2 \times 0.75 \text{ mm}^2$  (AWG 18).

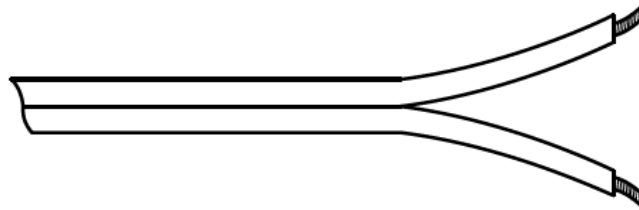

#### MULTIPLE LED STRIP CONNECTION NOTES

Several Lumistar strips can be connected in series to a constant current (CC) driver. They can be wired for parallel or series connection. Due to the special conditions in the production process of LEDs, the specified values are statistical averages. The individual LED may deviate from them.

The LED modules and all their components must not be mechanically stressed.

Avoid undue claw action, e.g. by screwing or excessive bending.

The LED modules must not come into contact with aggressive chemical substances, either in operation or in storage.

The installation of the module (with the operating device) must be carried out in compliance with all applicable electrical and safety standards.

Pay attention to standard ESD precautions when installing the modules.

- The components on the LED modules must not be subjected to mechanical stress.
- The conductive paths on the boards must not be damaged or interrupted by the installation.
- Store and operate the LED modules only at a final humidity of 10% to 60%.

## LUMIBAR-26-3098+ NICHIA LED STRIP ZHAGA L28W2 WHITE CRI 80-99 1800-7800K 350MA 26 LEDS 28CM

Our LED modules are not protected against overload, overtemperature and short-circuit currents. To operate the modules safely and reliably, it is therefore necessary to use an electronically stabilized power supply unit in which these in which these safety functions are already integrated. If other power supplies than the ones distributed by us are used, the following protective

the following protective measures must be ensured on the power supply side:

MINIMUM REQUIREMENTS FOR POWER SUPPLIES: Short circuit protection - Overload protection - Overtemperature protection

- The installation of LED modules may only be carried out in compliance with all applicable regulations and standards by an authorized electrician.

Distribution and reproduction of this document, utilization and communication of its contents are prohibited unless expressly permitted. Any infringement will result in compensation for damages. All rights reserved in the event of patent, utility model or design registration.

We reserve the right to make technical changes.

**This LED strip can be ordered via the following websites:**

[www.ledrise.eu](http://www.ledrise.eu) / [www.lumistrrips.com](http://www.lumistrrips.com)

